



## Product Code

UTA-0850E Three Gang Prism Shrinkage Mould 50x50x200 mm  
UTA-0851E Spare Steel Inserts for UTA-0850, 12 pcs.  
UTA-0856E Reference Rod 205 mm Long with 6 mm Tips  
UTA-0858 Reference Rod, 205 mm Long with 8 mm Tips


## Standards

EN 1367-4; UNI 8520-22

The Three Gang Shrinkage Mould is used for the determination of the effect of aggregates on the drying, shrinkage and length change of hardened concrete when used together with the UTEST Length Comparators (UTCM-0200, UTCM-0210 or UTC-1170).

The mould is matchmarked and protected with anti-corrosion oil. Reference rod and spare steel inserts should be ordered separately.

Shrinkage Mould is supplied complied with the steel inserts screwed on.

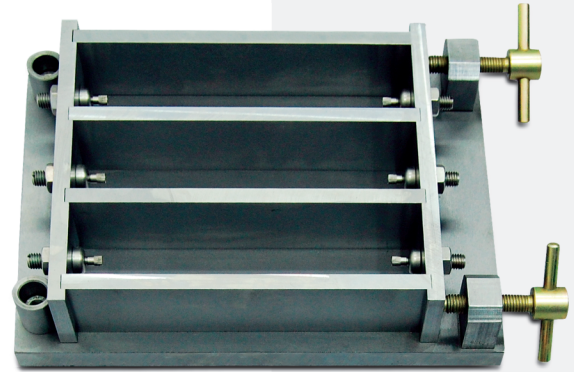

UTA-0850E



UTA-0856E

Dimensions	220x330x70 mm
Weight (approx.)	15 kg